

**SPECIFICATIONS**







Rated Current: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT  
 Max. Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

**Ordering Information**

5332 XX U P G0 B W 01

No. of Pins: 06~80P  
 Contact Plating: G0: Gold Flash

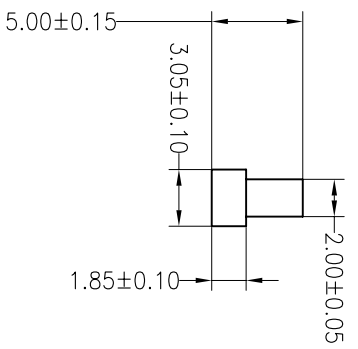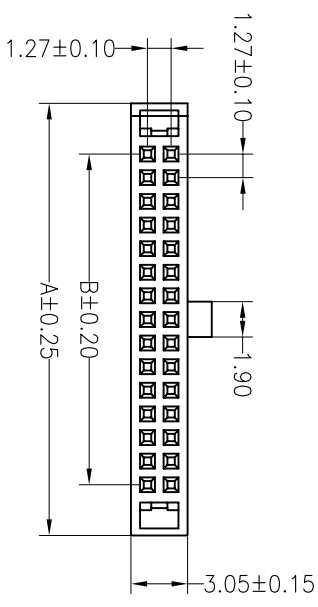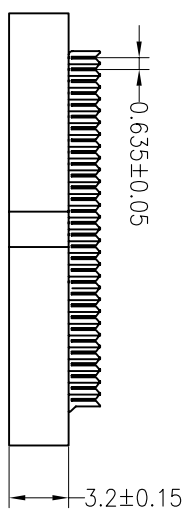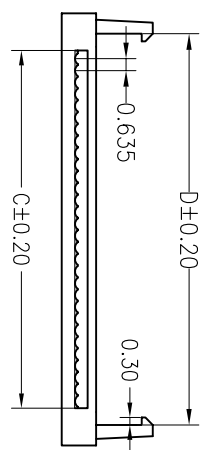

Pin	Dimension mm			
	A	B	C	D
06	8.00	2.54	4.20	5.30
08	9.27	3.81	5.47	6.57
10	10.54	5.08	6.74	7.84
12	11.81	6.35	8.01	9.11
14	13.08	7.62	9.28	10.38
16	14.35	8.89	10.55	11.65
18	15.62	10.16	11.82	12.92
20	16.89	11.43	13.09	14.19
24	19.43	13.97	15.63	16.73
26	20.70	15.24	16.90	18.00
30	23.24	17.78	19.44	20.54
34	25.78	20.32	21.98	23.08
40	29.59	24.13	25.79	26.89
44	32.13	26.67	28.33	29.43
50	35.94	30.48	32.14	33.24
60	42.29	36.83	38.49	39.59
64	44.83	39.37	41.03	42.13
68	47.37	41.91	43.57	44.67
80	54.99	49.53	51.19	52.29

OPERATION		DRAW		YTYuSheng		16.01.15		SCALE		FIT		PART NO.	
X.X		±0.30		CHECK		A4		mm		1/1		5332XXUFG0BW01	
X.XX		±0.20		APPROVE		A4		mm		1/1		1.27 FC(IDC) U TYPE NPin	
X.XXX		±0.10		CHANGE		PROJ.		DIM		TOL		TITLE:	
Angle		±3°		DATE		MODIFICATION DESCRIPTION		REV		DATE		REV	
A0		2016.01.15		NEW DRAWING		1		2		3		4	
A		B		C		D		E		F		G	

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992