HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

Note:
10P~12P With Slot "N",Without Slot "M"
14P~50P With Slot "M" and "N"

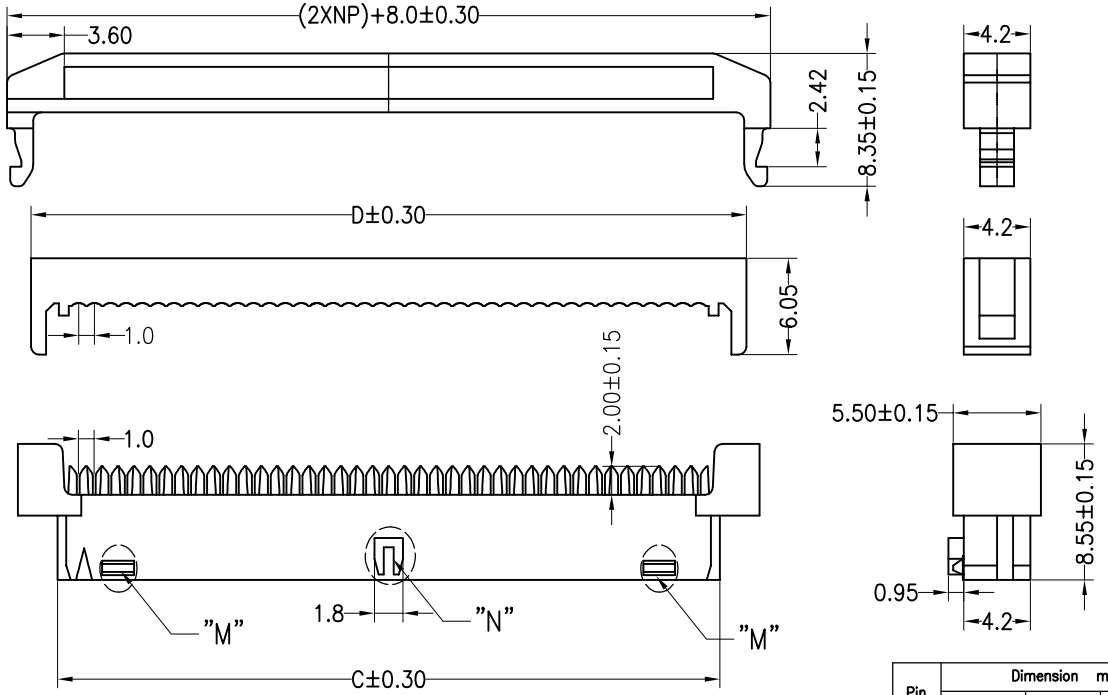

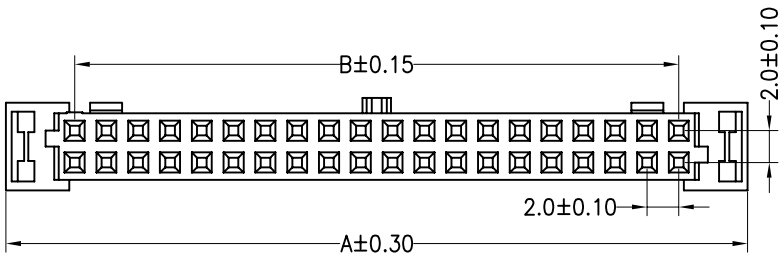

Pin	Dimension mm			
	A	B	C	D
10	16.65	8.00	11.65	15.00
12	18.65	10.00	13.65	17.00
14	20.65	12.00	15.65	19.00
16	22.65	14.00	17.65	21.00
20	26.65	18.00	21.65	25.00
22	28.65	20.00	23.65	27.00
24	30.65	22.00	25.65	29.00
26	32.65	24.00	27.65	31.00
30	36.65	28.00	31.65	35.00
32	38.65	30.00	33.65	37.00
34	40.65	32.00	35.65	39.00
36	42.65	34.00	37.65	41.00
40	46.65	38.00	41.65	45.00
44	50.65	42.00	45.65	49.00
50	56.65	48.00	51.65	55.00

Ordering Information

5325 XX S B XX B W 03

- XX: No.of Pins 10~50P
- B: Contact Material B=Brass
- XX: Contact Plating G0:Gold Flash N0:Gold Flash/NI NI:NI
- W: Option Type W=With Bump N=Without Bump

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.10.27	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	YiYuSheng	14.10.27	SCALE	FIT	
CHECK			UNIT	mm	
			SIZE	A4	
APPROVE			SHEET	1/1	
			PROJ.		

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 5325XXSBXXBW03

TITLE: 2.00mm FC M−Type NPin 三件式