

HSF ROHS **us** **CE**

SPECIFICATIONS






Rated(额定参数): 150V,8A
 Dielectric strength(抗电强度): AC:1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):26~16AWG
 Strip length(剥线长度):10mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Reed(弹片): Stainless steel (不锈钢)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)
 Button(手柄): POM, Color:Orange

	PITCH RANGE		NOMINAL DIMENSION RANGE				
	IN MM		IN MM				
TO	OVER 6	OVER 10	TO 30	OVER 60	OVER 100	OVER 100	OVER 150
6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	TO 150
	±0.10	±0.15	±0.25	±0.30	±0.50	±0.70	±1.00

Ordering Information

JL15EDGKNH - 350 XX X X 1

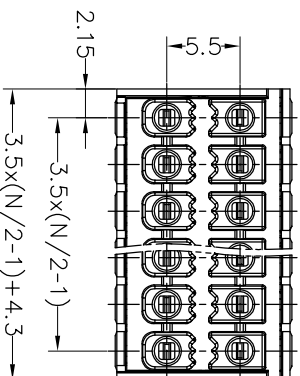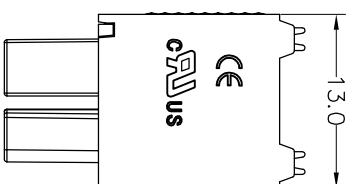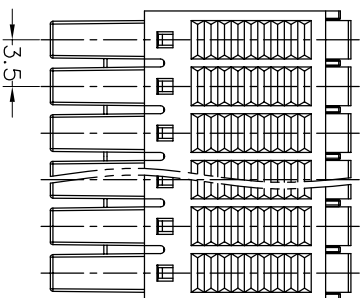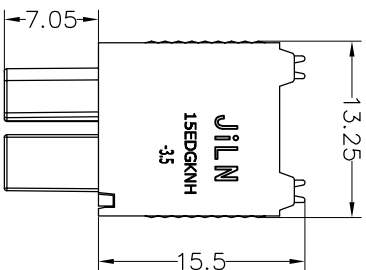

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.	TITLE:
A0	2019.12.12	NEW DRAWING		Angle	±3°	CHECK	A4	1/1	JL15EDGKNH-350XXXX1	3.5mm Pitch Female Pluggable Terminal Blocks
1										

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992