

SPECIFICATIONS





Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Ordering Information

1320-1 2 XX X N XX Z XXX X 01

No. of Pins	Insulator Material	Contact Plating	Pin Length	Post
Per Row	Option	GO:Gold Flash	A=1U" Gold	A=Troy
1x40	A=BK-PBT	G1:1U" Gold	G2:1.5U" Gold	T=Tube
2x40	C=BK-PA6T	G3:2U" Gold	G4:3U" Gold	O=Pe
3x40	D=BK-PA46	G5:5U" Gold	S0:Gold Flash/Tin	R=Tube&Reel
1--40	E=BK-PA9T	SN:Tin		P=Tube&Reel
2--80	F=BK-LCP			
3--120				

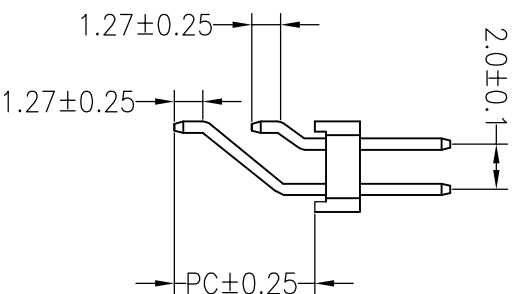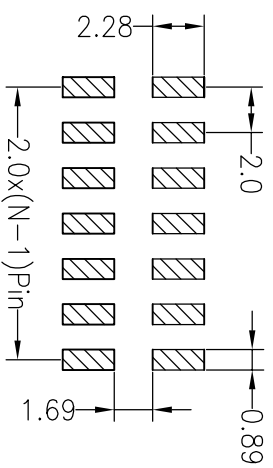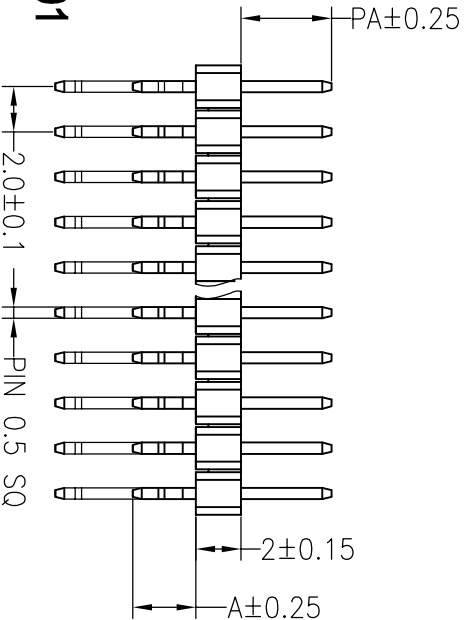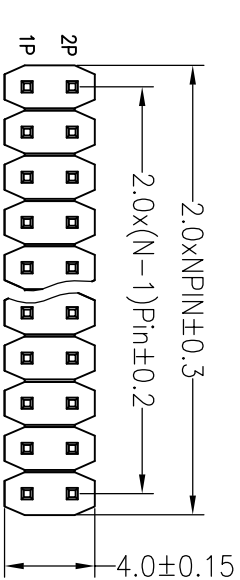

ITEM	PA	A	PC	L短	L长
Standard	3.00	3.40	6.60	8.50	12.50

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YTYuSheng	12.04.11	SCALE	FIT	PART NO.	TITLE:
				DIM	TOL				UNIT	mm		
A0	2012.04.11	NEW DRAWING		X.XX	±0.30	CHECK					1320-12XXXXXXZXXXX01	2.0PH 2xNpin H2.00mm 90° SMF
1				X.XX	±0.20	APPROVE						

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892