


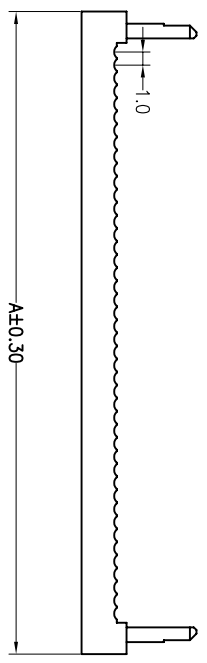



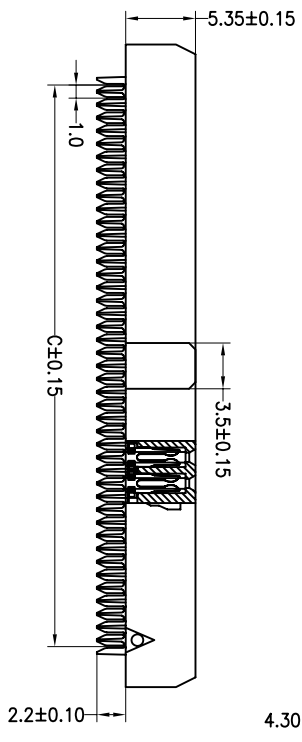

SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

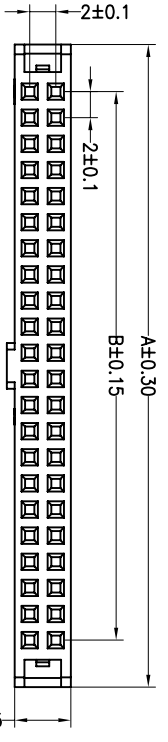

Ordering Information

5326 XX Y B XX B X 01

No. of Pins: 06~80P
 Contact Plating:
 S0: Gold Flash/Ni
 S1: 3U" Gold/Ni
 S2: 5U" Gold/Ni
 S3: 10U" Gold/Ni
 S4: 20U" Gold/Ni
 S5: 30U" Gold/Ni
 SM: Ni
 Option Type:
 W=With Bump
 N=Without Bump

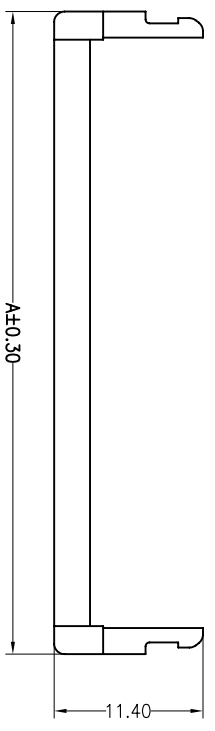

Strain Reliefe

Pin	A	B	C	Dimension mm
06	11.20	4.00	5.00	
08	13.20	6.00	7.00	
10	15.20	8.00	9.00	
12	17.20	10.00	11.00	
14	19.20	12.00	13.00	
16	21.20	14.00	15.00	
18	23.20	16.00	17.00	
20	25.20	18.00	19.00	
24	29.20	22.00	23.00	
26	31.20	24.00	25.00	
30	35.20	28.00	29.00	
34	39.20	32.00	33.00	
40	45.20	38.00	39.00	
44	49.20	42.00	43.00	
50	55.20	48.00	49.00	
60	65.20	58.00	59.00	
64	69.20	62.00	63.00	
68	73.20	66.00	67.00	
80	85.20	78.00	79.00	

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YTYuSheng	16.01.16	UNIT	mm	A4	1/1	5326XXYBXXBX01	
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1		
X.XXX	±0.10	APPROVE		PROJ.		TITLE:			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	2.00 FC(DC) Y-Type NPin			
1									

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992