
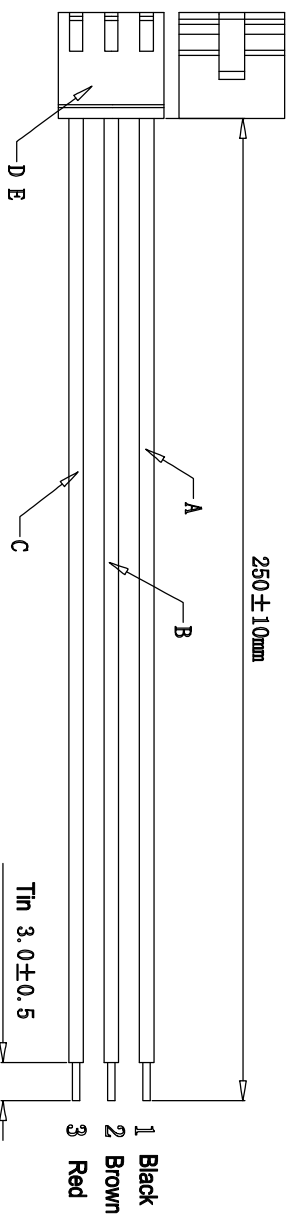


HSE ROHS



5P		8P		11P	
1	Black	1	Black	1	Black
2	Brown	2	Brown	2	Brown
3	Red	3	Red	3	Red
4	Black	4	Black	4	Black
5	Brown	5	Brown	5	Brown
		6	Red	6	Red
		7	Black	7	Black
		8	Brown	8	Brown
		9	Red	9	Red
		10	Black	10	Black
		11	Brown	11	Brown

- REMARKS :
1. 100% OPEN/SHORT TEST.
 2. DC TEST 300V/10ms
 3. Insulation Resistance:5.0M OHM/Min.
 4. Conductance Resistance:5.0 ohm/Max

NO.	Specification	QTY
E	JAE2. 5-T Tin,Female Terminal	3PCS
D	JAE2. 5-3P Housing,Brown	1PCS
C	UL1007 24# OD:1.4 L=255mm Red 2.5*255*3.0	1PCS
B	UL1007 24# OD:1.4 L=255mm Brown 2.5*255*3.0	1PCS
A	UL1007 24# OD:1.4 L=255mm Black 2.5*255*3.0	1PCS

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	SCALE	FIT	PART NO.
				DIM	TOL				
A0	2015.12.19	NEW DRAWING		X.X	±0.30	CHECK	A4	1/1	JW06-XXSNB25001
1				X.XX	±0.20				
				X:XXX	±0.10				
				Angle	±3'				
				DIM					

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

2.5mm NP Housing Cable to Open L=250mm